

Homework 1

1. Consider the ‘unicycle’ model of a slipping automobile wheel depicted in Figure 1. The tire

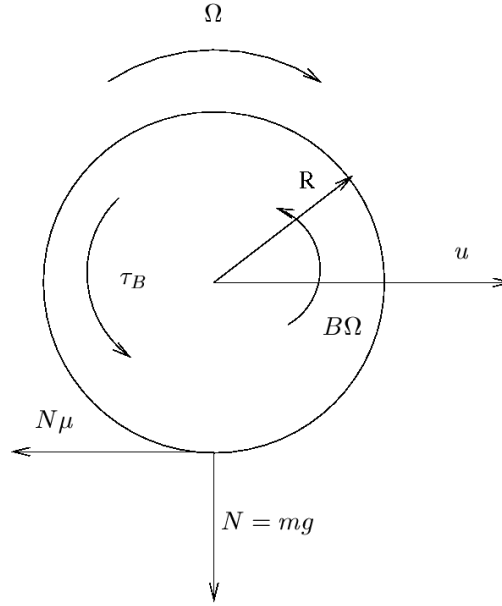


Figure 1: The wheel forces.

dynamics are described by the following two equations

$$m\dot{u} = -N\mu(\lambda) \quad (1)$$

$$I\dot{\Omega} = -B\Omega + NR\mu(\lambda) - \tau_B, \quad (2)$$

where u is the linear velocity and Ω is the angular velocity of the wheel, m is the mass and $N = mg$ is the weight of the vehicle, R is the radius of the wheel, I is the moment of inertia of the wheel, $B\Omega$ is the bearing friction torque, τ_B is the braking torque, $\mu(\lambda)$ is the friction force coefficient, and the wheel *slip* is defined as

$$\lambda(u, \Omega) = \frac{u - R\Omega}{u} \quad (3)$$

for the case of braking when $R\Omega \leq u$. The friction force coefficient $\mu(\lambda)$ is shown in Figure 2, from which it is seen that there exists an optimum μ^* at λ^* . Since \dot{u} is measurable via an accelerometer (they are already in use for airbags), the following simple controller

$$\tau_B = -\frac{cIu}{R}(\lambda - \lambda_0) - B\Omega - \frac{I\Omega}{u}\dot{u} - mR\dot{u}, \quad c > 0 \quad (4)$$

is implementable, and it is easy to see that it yields

$$\frac{1}{c}\dot{\lambda} = -\lambda + \lambda_0. \quad (5)$$

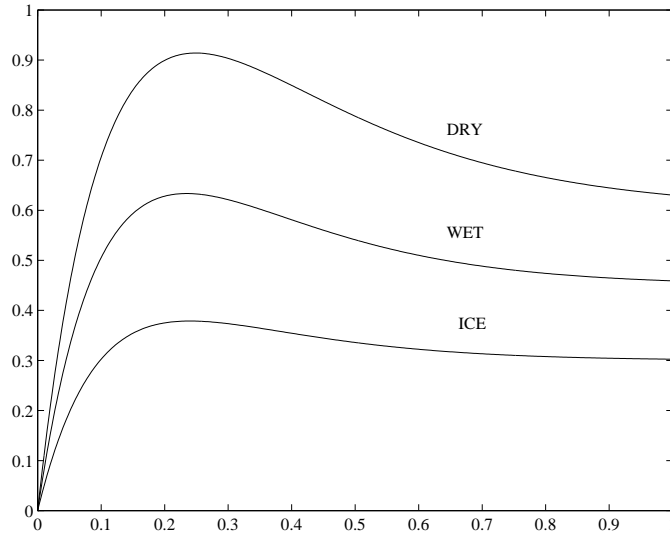


Figure 2: The friction force coefficient $\mu(\lambda)$.

Treating $y = -\dot{u}$ as the output, design an extremum seeking scheme that estimates λ_0 to maximize $\mu(\lambda)$ in steady state and present simulation results. Use

$$\mu(\lambda) = 2\mu^* \frac{\lambda^* \lambda}{\lambda^{*2} + \lambda^2}. \quad (6)$$

with $\lambda^* = 0.25$ and $\mu^* = 0.6$. Choose the vehicle/wheel parameters as $m = 400kg$, $B = 0.01$, $R = 0.3m$. Let the initial conditions be: $u(0) = 120km/hr = 33.33m/sec$ for linear velocity, and $\Omega(0) = 111.1rad/sec$ for angular velocity, which makes $\lambda(0) = 0$. How much time does it take for your “vehicle” to stop? How about the distance?